

[®]
PARKKY



ENG | 2022

A PRODUCT OF DECOSPAN.

It's good to live on wood



Contents

| | |
|----|-------------------------------------|
| 4 | It's good to live on wood |
| 8 | Why Parky |
| 14 | Collection |
| 24 | Inspiration |
| 40 | Overview |
| 42 | Installation and maintenance |

It's good to live on wood



A PRODUCT OF DECOSPAN.

Wood is something to love. It brings nature into your home. Due to the uniqueness and characteristics of the trees, not one board is the same. The beauty of imperfections caused by the veins and structure brings life-hood to your floor. Easy to install like a laminate floor, care and maintenance free as vinyl but with the warmth and cosiness of real hard wood.



As sustainable grown wood is getting scarce, we are extremely mindful using it. By using veneers, thinly sliced layers of real wood, we maximize the use of the harvested wood species grown over decades. Reinforcing the thin layers of wood with a 100% wood based High Density Fibre board we create all natural floors which are stronger and way more durable than your classic wooden floor. This combination allows you to live at the fullest on your beautiful wood floors.

Our goal is to make wood floors that inspire. For over 40 years we have innovated our production processes to achieve a rock solid finish. Everything is made in Belgium, at the heart of Europe, with the help and knowledge of an amazing team. 900 employees around the globe are fully committed to create the floor for your home or project. We are going the extra mile to create fabulous looks, sharp prices with woods full off character. This in order for you to achieve the interior look and feel of your dreams.



Our Titanium finish has eight robust layers of lacquer. This results in an almost scratch-resistant natural floor designed for intensive use.



Why Parky



02

A sustainable choice

Wood is precious. We use it sparingly: we only use a thin layer of wood for the top finish. We source our trees from **sustainable managed forests** and every board is **100% recyclable**, participating as such in the circular economy. We source energy from solar and wind production. The sawdust and wood waste from our production facility is used to heat the floor space. The future is a CO₂ neutral world.

Real wood

Feel real wood. Each Parky floor is finished with a **top layer of authentic wood species**, in oak or walnut. Just like a solid wood floor, no two boards are the same. A beautiful natural look, combined with the warmth of wood.



01

03

Waterproof surface

The Parky board has a **waterproof surface**. The combination with the **Aqua Sealing Complete system**, which protects the bevels, gives you a 12 hour waterproof floor. This makes your floor bullet proof for daily spills and drops.



04

High-strength and scratch resistant

Parky floors are ultra strong. On one hand, the wooden top layer is pressed onto a **high density fibre board (HDF)**, that makes your floor stronger and more dimensionally stable than any traditional solid or engineered wooden floor.



On the other hand, the wooden top layer is finished with our **Titanium finish**, that consists of eight robust layers of lacquer. This makes your floor even more scratch-resistant and ready for intensive use.

Use Parky with peace of mind in the toughest places of your house such as your kitchen or high traffic areas in commercial use such as hotel lobby's, offices, retail stores...

The secret lies in the well-thought-out structure



Titanium: the invisible 8-layer varnish

We can call it **Titanium!** Extremely strong due to eight layers of especially developed "bullet" proof lacquer. Your floor will be **resistant to daily wear and tear as well as scratches**, the **pores are moist and dirt resistant**. A **brushed finish** is available allowing you to feel the natural grains and patterns of the wood. This extremely strong and matt lacquer is nearly invisible.



Wood backing for dimensional **stability**.

With Deluxe+ a 2 mm layer of cork provides a **softer footfall sound**.

Real Wood

On the HDF board we press a **wood wear layer** according to the DSI system (Double sided impregnation). During this process the adhesive gets pressed into the wood. While lacquering the top layer, the wood absorbs the varnish and makes a fusion with the adhesive. The result is a Titanium wooden top layer.



Strong high-density board

The thinner the wooden top layer, the more resistant the floor is to impact. The HDF just below the wear layer is even **stronger than natural wood**. This allows us to make sure the floor is more resistant to heavy objects or stiletto heels.



Wear layer: 0.6mm thick Wear layer: 2mm thick Massif oak



Completely hygienic

Parky's V grooves are not a hotbed for dust and dirt. Each groove is coloured and sealed with the **Aqua Sealing Complete system**. This **protects your wood against moisture**. Each board also has an **"Ultra-fresh" antibacterial protection** to withhold bacteria from settling into the groove. A hygienic floor is guaranteed.



Easy to install


Parky, it's as **easy to install as laminate and LVT**. Count on the handy **Uniclic®** and **Unifit X®** system for a problem free result. The warmth and feel good of wood is just a click away.



Discover even more advantages

Perfect match with your radiant heating

Different kinds of radiant heating systems can be used with Parky. All technical details can be found on our website.



Floor for healthier indoor air quality.

The Parky floor is only finished with water based stains, adhesives without volatile organic compounds and solvent free stains. It is scientifically proven: indoor **air quality improves** with a Parky floor. All floors have a **A+ quality label**.



Experience your best moments on a real wooden floor. Imitations such as vinyl or laminate can never match the warmth and uniqueness of real wood. You don't just see it, you feel it...

Endless variations with pure nature



- **Your species**
Wide range of wood species and colours.
- **Your patterns**
From straight boards to a herringbone pattern.
- **Your sizes**
Boards in different lengths and widths, with or without a 2 mm cork underlayer.

Oaks



European Oak



Essence Oak



Ivory Oak



Milk Oak



Silk Oak



Desert Oak



Umber Oak



Valley Oak



Antique Oak



Mountain Oak

Walnuts



Frozen Walnut



Smoked Walnut

Do you prefer authentic oak planks, or would you prefer a walnut parquet with a pronounced structure? From rich chocolate brown to milky white, we'll be happy to help you choose the right colour.

The uniqueness of oak

There are plenty of oak options. Pure oaks give you the emphasis of a pure and clean look; the rustic variant has a more pronounced character thanks to the knots. It's up to you to choose the look and feel you want.



More information regarding the possible combinations of colour, style or size can be found on page 40

PREMIUM

We only use the purest veneer wood for our Premium boards. Exceptionally pure quality from the very best of nature.

RUSTIC LIGHT

This rustic wooden floor seeks the balance between smaller and larger knots for a more pronounced style.






The pattern that suits you

Parky offers you endless combinations. Whatever pattern you choose, it remains timeless, from ultra-sleek villas to stately mansions and everything in between. Different lengths and widths offer a wide range of choices: from a classically laid board floor to a herringbone pattern. Even a double herringbone pattern is possible.



Deluxe+ Ivory Oak Premium

Herringbone




Double herringbone



Available as pattern floor



European Oak



Ivory Oak



Smoked Walnut



Calculate how many boards you need with our handy Pattern Calculator at patterns.par-ky.com



The **size of the room** determines the size of your boards. For smaller rooms, opt for narrow, short boards. For larger spaces, wider and longer boards are the way to go. The direction also affects the end result. If you lay out your boards lengthwise, your room looks bigger. We'll give you **five possible sizes** to work with. Don't worry if you find it difficult to choose, feel free to ask your distributor for advice.

Two click systems
All our floors are equipped with the handy **Uniclic®** or **Unifit X®** system, which makes installation as easy as it can be. With the Unifit X® fold-down option, you can even save 30% on installation time. All the advantages of a click laminate, but with the difference that you feel the warmth of real wood under your feet.

Board floors

Pro



1203 x 190 x 7,2 mm



Master



1506 x 166 x 10 mm

Deluxe+



1810 x 166 x 12 mm



Summit




2050 x 233 x 10 mm

Pattern floor


Swing



593 x 121 x 10 mm



Herringbone



Double herringbone



Which colour and style can be combined can be found in the overview on page 40



Calculate how many boards you need with our handy Pattern Calculator at patterns.par-ky.com

Floors made to live on

Each wood specie has its own character that can match your personality or taste. You choose from a wide range of colours, patterns and sizes until you find the wooden floor that fits perfectly into your interior. Sleek and subtle, rustic for a pronounced touch or the warm character of our Walnut collection – you decide.





Wood is a natural product.

The differences in color and structure are part of it. This makes it **beautiful and unique**. There are different kinds and it gives the floor a certain appearance. Are you looking for a **sleek, modern interior**? Then choose a **Premium** quality. Do you prefer a **country style**? Then go for **Rustic Light**.



Antique Oak Premium



Umber Oak Premium



Valley Oak Premium

Commercially rated floors

Parky floors are made to live up to their full potential. This also makes them suitable for places where there is a lot of traffic, such as an office or retail. Lots of traffic isn't a problem: thanks to a high-quality finish in class 33, our floors are made for intensive use.





Desert Oak Premium

Long, wide boards are ideal for larger spaces

The size of the space determines the size of the boards. For smaller spaces, it is best to choose narrow, short boards. In large spaces, broad, long boards come more into their own.

The orientation of the boards also has an effect. Long boards installed along the length of a room make the room look even longer.



Ivory Oak Rustic Light



Milk Oak Premium

The finish that gives your wooden floor a touch of perfection

We finish each board with a **Titanium finish**. Eight layers of high-strength lacquer that makes your wood almost "bullet" proof. This makes the surface **waterproof, protects pores in the wood** and makes it **easy to maintain**.

Our **brushed** finish accentuates the natural structure of the wood and gives the grain a beautiful appearance. On top, these brushed floors have a matt finish, giving them a very natural look.






Smoked Walnut




Mountain Oak Rustic Light

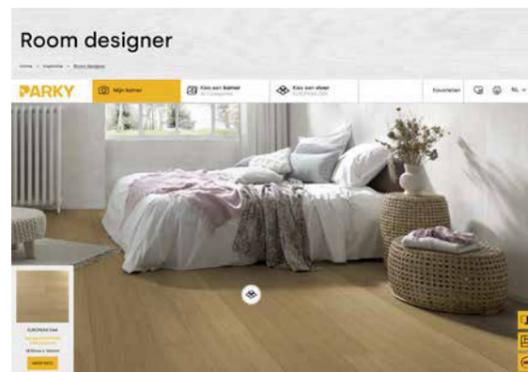

You can now also view the floor in your own room. Discover our brand new "Room Designer" on the site and via this QR code.

**Live life to the fullest
and enjoy every piece
of floor. The colour,
the structure, the
warmth of real wood.**

PARKY[®]

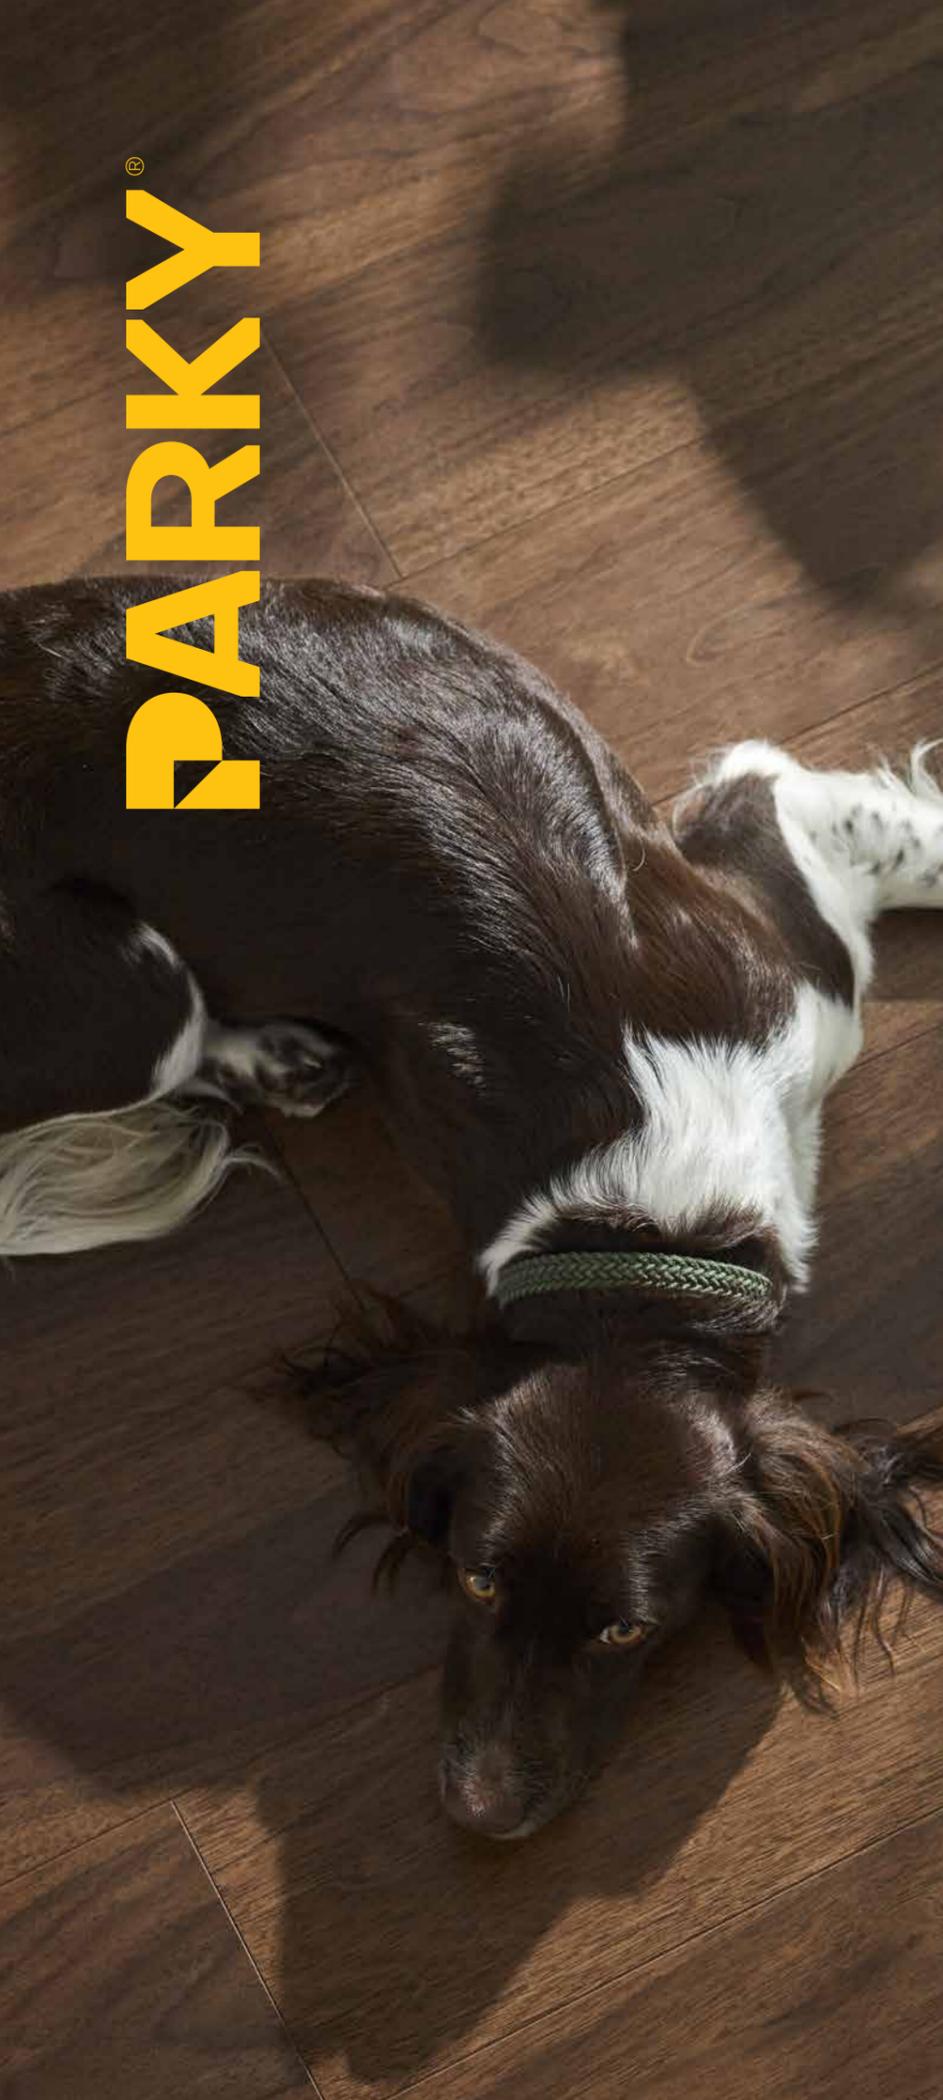

| BOARD FLOOR | | | | PATTERN FLOOR |
|---|---|---|---|---|
|  |  incl. 2 mm cork |  |  |  |
| Pro | Deluxe+ | Master | Summit | Swing |

| Usage classification* | |  |  |  |  |  |
|-----------------------|---------------------|---|---|---|---|---|
| Board | Dimensions | 1203 x 190 mm 47-3/8 x 7-1/2 inch | 1810 x 166 mm 71-1/4 x 6-1/2 inch | 1506 x 166 mm 59-5/16 x 6-1/2 inch | 2050 x 233 mm 80-3/4 x 9-1/8 inch | 593 x 121 mm 23-3/8 x 4-3/4 inch |
| | Thickness | 7,2 mm 9/32 inch | 12 mm 1/2 inch | 10 mm 3/8 inch | 10 mm 3/8 inch | 10 mm 3/8 inch |
| | Wear layer | 0,6 mm |
| | Click system |  |  |  |  |  |
| Box | Boards | 11 | 7 | 8 | 5 | 11 |
| | Surface area | 2.514 m ² 27.06 sq.ft | 2.103 m ² 22.64 sq.ft | 2.000 m ² 21.53 sq.ft | 2.388 m ² 25.7 sq.ft | 0.789 m ² 8.49 sq.ft |
| | Weight | 16,30 kg | 17,70 kg | 17,3 kg | 19,20 kg | 6,9 kg |
| Finish | Bevel | Maxi +/- 1,5 mm - | 2 | - | 2 | - |
| | | Mini +/- 0,5 mm 4 | 2 | 4 | 2 | 4 |
| | Gloss | Super matt (3%) |
| | Structure | Brushed | Brushed | Brushed | Brushed | Brushed |

Oaks

| | | | | | |
|---------------------|--------------|---------------|-----------------|----------------|----------------|
| European Oak | Premium | PRB101 | DEXB+101 | | SWXB101 |
| | Rustic Light | PRB135 | | | |
| Ivory Oak | Premium | PRB102 | DEXB+102 | | SWXB102 |
| | Rustic Light | PRB110 | DEXB+110 | | |
| Milk Oak | Premium | PRB103 | | | |
| | Rustic Light | PRB137 | | | |
| Desert Oak | Premium | PRB104 | DEXB+104 | | |
| | Rustic Light | PRB116 | | | |
| Umber Oak | Premium | PRB134 | | | |
| Antique Oak | Premium | PRB106 | | | |
| Mountain Oak | Rustic Light | PRB199 | | | |
| Essence Oak | Premium | | MAXB188 | SUXB188 | |
| Silk Oak | Premium | | MAXB193 | SUXB193 | |
| Valley Oak | Premium | | MAXB194 | | |

Walnuts

| | | | | | |
|----------------------|--|---------------|--|----------------|----------------|
| Smoked Walnut | | PRB203 | | | SWXB203 |
| Frozen Walnut | | | | SUXB218 | |

* Usage classification 31: residential + low commercial. Usage classification 33: residential + high commercial.

These handy tools make it as easy as it can be to install



You will find the installation instructions on each package, on the site and via this QR code

Installation kit

Installing Parky is easy. With our installation kit you have all the necessary tools to install your floor quickly and without damage: spacers to respect the expansion joint, a pull bar and a tapping block.



Choose the right underlay

Damp foil (150 micron, 25m²/pack)

- This damp foil serves as a vapour barrier and can only be used on Parky floors with an integrated cork layer (Deluxe+ 06). Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Basic underlay (2 mm thick, 20m²/roll)

- This affordable and high-quality underlay guarantees a comfortable sound absorption.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Silent underlay (2 mm thick, 20m²/roll)

- This premium underlay guarantees a maximum sound absorption and offers a contact sound insulation improvement of at least 20 dB.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Waterproof tape



Protecting your floor against rising moisture is a must. We recommend you use Parky's tested waterproof tape to glue your underlay together. It's the only way to protect the backside of the floor.



This is how you finish your floor to the last detail

Veneer skirtings


The crowning glory: a matching wooden moulding.

Veneer skirtings dimensions:
2150 x 80 x 12 mm
84.6 x 3.2 x 15/32 inch



Paintable skirtings

Choose white paint baseboards if you want a clean, modern look. You can easily paint the baseboards in the same colour as the wall.



Paintable skirtings dimensions:
2150 x 69 x 12 mm
84.6 x 2.7 x 1/2 inch

Profiles

Wooden profile (residential applications)


This handy 3-in-1 profile is available in all Parky colours.

Particularly useful as

- End profile (jointless horizontal finish)
- Reducer profile (to bridge the gap with a lower floor)
- T-profile (expansion profile)

Dimensions profile:

2150 x 48 x 13 mm
84-5/8 x 1 7/8 x 33/64 inch

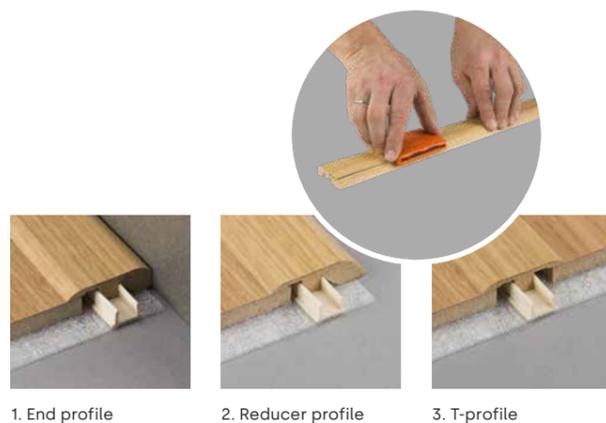

1. End profile

2. Reducer profile

3. T-profile

Aluminium profiles (commercial applications)

We developed aluminium profiles that are stronger than the wooden variant. Ideal for intensive use.

Dimensions profile:

- Connecting profile 900 x 38 mm - 35.4 x 1.5 inch
- End profile 2700 x 30 mm - 106.3 x 1.9 inch



Connecting profile

End profile

How to keep your floor in a fabulous shape

You can count on the Parky cleaner to clean your floor without damaging the varnish. It was specially developed to remove dirt and protect your wood.



Wood Floor Cleaner

1000 ml
Dilute the cleaner with water.
Clean your floor with a slightly damp cloth.

Repair Pens

Repair small scratches in a jiffy. Boxes with one or two pens are available, depending on the colour of your floor. Once repaired, no more dirt can penetrate the scratch.



Repair Wax

Using the Repair Wax you can repair dents that come through the paint. The wax repairs the damage and protects your floor against penetrating moisture. The Repair Wax kit contains seven wax blocks, a melting knife and a spatula.



Severe damage? Not a disaster

Thanks to the clic system, you can easily replace a board in your floor. Consult your distributor or replace your board yourself.

The complete manual of our maintenance products and tutorials for replacing a board can be found at www.par-ky.com





| | | Pro |
|--|-----------------------------------|--|
| | TEST METHOD | |
| Wood veneer floor covering | EN14354/EN14352 | |
| Domestic usage classification | EN685 | Class 23 |
| Commercial usage classification | EN685 | Class 31 |
| Warranty | DECOSPAN nv | Residential use: 15 years Low commercial use: 5 years |
| CE certification | EN14342 | EN14342:2013 |
| Dop n° | | 19005 |
| GENERAL PROPERTIES | | |
| Moisture content | EN322 | 6 % (+/-1) |
| Dimensions of floor boards | EN14354 | 1203 x 190 x 7.2mm |
| Thickness of the wear layer | EN14354 | 0.6 mm |
| Deviation of thickness | EN14354 | ±0.5 mm |
| Deviation of squareness | EN324-2 | ±0.2 mm |
| Cup in width direction | EN14354 | ±0.2 % |
| Flatness deviation | | 4% |
| Internal bond | EN319 | > 1.4 N/mm² |
| Veneer glueing adhesion | EN204/205 | ≥ 1 N/mm² |
| Mechanical connection system | | Uniclic® |
| Opening between elements | EN14354 | ≤ 0.2 mm |
| Tensile strength on short end | ISO24334 | > 2000 N/lm |
| Density | EN323/EN672 | 900 |
| Weight/m² | | 7 kg |
| CLASSIFICATION PROPERTIES | | |
| Thickness distention | EN 13329 annex G | < 13% |
| Resistance to indentation | EN 1534 | ≥ 30 N/mm² |
| Resistance to abrasion | EN 14354//EN112.73.XX | > 2000 rev. |
| Impact resistance | EN 438-2.21 | ≥ 1200 (EC2) |
| Adhesion of the lacquer | EN ISO 2409 | class < 2 |
| Resistance to chemical agents | EN 423/part 2 | grade 4* |
| ADDITIONAL PROPERTIES | | |
| Appearance of the lacquer | EN 438/2-5 | ok |
| Gloss | EN 2813 | super matt 3% (+/- 1) |
| Hardness of the lacquer | DIN 53154 | ≥ 3 Newton |
| Residual indentation | EN 433 | < 0.05 mm |
| Impact resistance acc. to Wegner | EN 438-2/11 | ≥ 5 Newton |
| Elasticity of the lacquer | CEN/TC112 (Brinell) | 2 Hb |
| Colour fastness | EN 105-B02 | grade > 6 |
| Castor chair resistance | EN 425 | no visible change |
| Underfloor heating | | OK |
| Thermal resistance | EN 12667 | 0.053 m²K/W |
| Thermal conduction | EN 12667 | 0.14 W/mK |
| Normalized impact sound pressure level | ISO 10140-3 & 717-2 (Ln,w) | 55 dB |
| Reduction of impact sound pressure level | ISO 10140-3 & 717-2 (ΔLw) | 20 dB |
| A-weighted walking noise | EN 16205:2018 (Ln,walk,A) | 91 dB (A) |
| Loudness of reflected walking noise | EN16205:2018 Loudness RWS | 68.7 sone |
| Antistatic performance | EN 1815 | < 2 kV (antistatic) |
| Biological durability | EN 335-1/EN335-2 | Class 1 |
| Well-managed forests | | FSC® certified*** (optional) |
| Resistance to termites | | good |
| Resistance to bacteria | | Ultrafresh |
| Recycling | | ok |
| Martindale test (scratch resistance) | EN16094 | B3 |
| SAFETY PROPERTIES | | |
| VOC loss | French legislation ISO16000 | A+ |
| VOS M1 EU | | Pass |
| VOS LEED VA/CDPH | | Compliant |
| VOS BREEAM | | Compliant |
| VOS Indoor air comfort GOLD | | Pass |
| Formaldehyde emission | E1 (EN 717-1) | Class E1 (<0.13 ppm) |
| Formaldehyde emission | E1 (EN 717-2) | Class E1 (<3.5 mg/m³h) |
| Formaldehyde emission | ASTM E 1333-96 | CARB 2 |
| Exudation of plasticizers | EN 665 | 0% |
| PCP (pentachlorophenol) | CEN/TR 14823 | PCP free |
| Burning cigarette | EN 438-2/30 | Class 3** |
| Fire reaction and smoke generation | EN 13501-1 | Class Cfl S1 (Bfl S1 on demand) |
| Slip resistance (dry) | CEN TS15676: 2017 (pendulum test) | 62.25 USRV (average) |
| Slip resistance (wet) | CEN TS15676: 2017 (pendulum test) | 47.75 USRV (average) |

| Deluxe+ | Master | Summit | Swing |
|---|---|---|---|
| Class 23 | Class 23 | Class 23 | Class 23 |
| Class 33 | Class 33 | Class 33 | Class 33 |
| Residential use: limited lifetime warranty Commercial use: 10 years |
| EN14342:2013 | EN14342:2013 | EN14342:2013 | EN14342:2013 |
| 19007 | 19003 | 19004 | 19010 |
| 6 % (+/-1) | 6 % (+/-1) | 6 % (+/-1) | 6 % (+/-1) |
| 1810 x 166 x 12 mm | 1506 x 166 x 10 mm | 2050 x 233 x 10 mm | 593 x 121 x 10mm |
| 0.6 mm | 0.6 mm | 0.6 mm | 0.6 mm |
| ±0.5mm | ±0.5mm | ±0.5mm | ±0.5mm |
| ±0.2 mm | ±0.2 mm | ±0.2 mm | ±0.2 mm |
| ±0.2 % | ±0.2 % | ±0.2 % | ±0.2 % |
| 3% | 3% | 3% | 3% |
| > 1.3 N/mm² | > 1.3 N/mm² | > 1.3 N/mm² | > 1.3 N/mm² |
| ≥ 1 N/mm² | ≥ 1 N/mm² | ≥ 1 N/mm² | ≥ 1 N/mm² |
| Unifit X® | Unifit X® | Unifit X® | Unifit X® |
| ≤ 0.2 mm | ≤ 0.2 mm | ≤ 0.2 mm | ≤ 0.2 mm |
| > 2000 N/lm | > 2000 N/lm | > 2000 N/lm | > 2000 N/lm |
| 850 | 850 | 850 | 850 |
| 10 kg | 7 kg | 7 kg | 7 kg |
| < 10 % | < 10 % | < 10 % | < 10 % |
| ≥ 40 N/mm² | ≥ 40 N/mm² | ≥ 40 N/mm² | ≥ 40 N/mm² |
| > 6000 rev. | > 6000 rev. | > 6000 rev. | > 6000 rev. |
| 1400 (EC3) | ≥ 1400 (EC3) | ≥ 1400 (EC3) | ≥ 1400 (EC3) |
| class < 2 | class < 2 | class < 2 | class < 2 |
| grade 4* | grade 4* | grade 4* | grade 4* |
| ok | ok | ok | ok |
| super matt 3% (+/- 1) |
| ≥ 4 Newton | ≥ 4 Newton | ≥ 4 Newton | ≥ 4 Newton |
| < 0.05 mm | < 0.05 mm | < 0.05 mm | < 0.05 mm |
| ≥ 8 Newton | ≥ 8 Newton | ≥ 8 Newton | ≥ 8 Newton |
| 2 Hb | 2 Hb | 2 Hb | 2 Hb |
| grade > 6 | grade > 6 | grade > 6 | grade > 6 |
| no visible change | no visible change | no visible change | no visible change |
| OK | OK | OK | OK |
| 0.109 m²K/W | 0.073 m²K/W | 0.073 m²K/W | 0.073 m²K/W |
| 0.11 W/mK | 0.14 W/mK | 0.14 W/mK | 0.14 W/mK |
| 60 dB | 56 dB | 56 dB | 56 dB |
| 15 dB | 19 dB | 19 dB | 19 dB |
| 97 dB (A) | 94 dB (A) | 94 dB (A) | 94 dB (A) |
| 96.1 sone | 80.3 sone | 80.3 sone | 80.3 sone |
| < 2 kV (antistatic) |
| Class 1 | Class 1 | Class 1 | Class 1 |
| FSC® certified*** (optional) | FSC® certified*** (optional) | FSC® certified*** (optional) | FSC® certified*** (optional) |
| good | good | good | good |
| Ultrafresh | Ultrafresh | Ultrafresh | Ultrafresh |
| ok | ok | ok | ok |
| B1-2 | B1-2 | B1-2 | B1-2 |
| A+ | A+ | A+ | A+ |
| Pass | Pass | Pass | Pass |
| Compliant | Compliant | Compliant | Compliant |
| Compliant | Compliant | Compliant | Compliant |
| Pass | Pass | Pass | Pass |
| Class E1 (<0.13 ppm) |
| Class E1 (<3.5 mg/m³h) |
| CARB 2 | CARB 2 | CARB 2 | CARB 2 |
| 0% | 0% | 0% | 0% |
| PCP free | PCP free | PCP free | PCP free |
| Class 3** | Class 3** | Class 3** | Class 3** |
| Class Cfl S1 (Bfl S1 on demand) |
| 62.25 USRV (average) | 62.25 USRV (average) | 62.25 USRV (average) | 62.25 USRV (average) |
| 47.75 USRV (average) | 47.75 USRV (average) | 47.75 USRV (average) | 47.75 USRV (average) |

* 1=surface destruction, 5=no visible changes / ** class 3 = moderate change of gloss level and/or moderate brown spot / *** FSC C095327



LIUNI S.P.A.

Via G. Stephenson 43, 20157 Milano
Tel. +39 02 30731 - Fax +39 02 3073221
info@liuni.com
www.liuni.com

Filiale Roma

Via Aurelia 547|557A 00165 Roma
Tel. +39 06 6604851 - Fax +39 06 66048540
filialeroma@liuni.com

Filiale Verona

Via G. De Sandre 9, 37135 Verona
Tel. +39 045 592861
filialeverona@liuni.com

It's good to live on wood

Choosing a floor isn't just something you use your eyes for. You have to be able to feel it and experience for yourself what the effect of each type of wood and finish is. Count on our experts, who will be happy to put their savoir-faire at your disposal to help you.



Quickly find a store near you?

Scan the code or go to
www.par-ky.com/en/dealers



Need more inspiration?

Follow us on Instagram
[@parkyfloors](https://www.instagram.com/parkyfloors) #myPARKYfloor

PARKY®

Decospan nv
Industriezone Grenslan
Lageweg 33
8930 Menen - Belgium
tel +32 56 52 88 49
info@par-ky.com

© Decospan 2022 - Nothing from this brochure may be reproduced without written prior permission. Please note that the information in this brochure may be outdated and a new version may already have been issued. That is why we recommend you to always consult our website to download the most recent version. The photos of the different wood species, as shown in this brochure, are a representation of a unique part of wood and are not binding for future deliveries. Decospan is committed to the continuous improvement of its products and services, therefore the actual products may differ from the products and pictures in this brochure. Decospan disclaims any liability pursuant to the variations that may occur between the products and pictures in this brochure and the actual products. All content in this brochure is for information purposes only and no rights can be obtained therefrom.

Proudly
made in
Belgium

a product of
DECOSPAN.
Wood Solutions